


## SOLUTIONS FOR PENETRATIONS: ZEMENTOL SR sleeve pipe

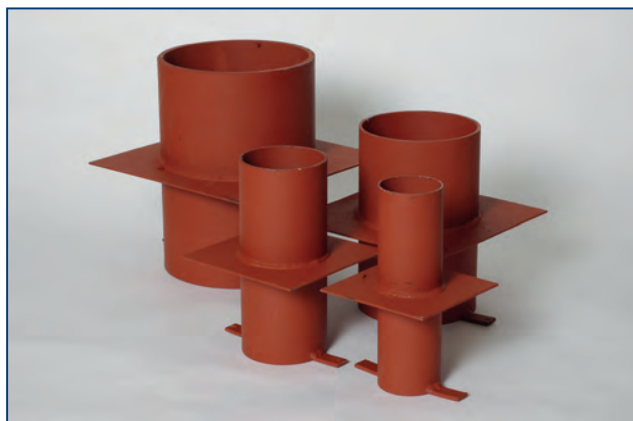

### Description:

- The ZEMENTOL SR has been developed for sealing relatively small to large diameter pipe penetrations in waterproof concrete structures. It is an auto-waterproofing component.
- ZEMENTOL SR can be used in slabs, decks and walls.
- The connection with metal and plastic pipes is not possible.
- The pipe forms an optimal bond with the waterproof concrete.
- ZEMENTOL SR can be used for the installation of ZEMENTOL MCT and ZEMENTOL RRD modular seals.

### Material and components:

- Primed steel tube.

### Size:

product type	nominal diameter (in mm)	size of flange (in mm)
ZEMENTOL SR 50	50	100 x 100
ZEMENTOL SR 70	70	150 x 150
ZEMENTOL SR 100	100	175 x 175
ZEMENTOL SR 150	150	250 x 250
ZEMENTOL SR 200	200	297 x 297

Normal length 250 or 300mm (special length on demand).

### Installation:

- Walls: the ZEMENTOL SR are fixed to the shutter board and encased in the concrete.
- Slabs and decks: the ZEMENTOL SR are installed in a position to leave a minimum distance of 10cm between the flange and the surface of the waterproof concrete in order to ensure sufficient concrete coverage.